




Application

Mobile PD is a key updater that can be carried in person. A Mobile PD is used in a CLIQ[®] Remote locking system to allow the administrator to update user credentials without having to have access to the key. When the user updates their key with a Mobile PD their permissions and schedules are downloaded automatically.

This allows changes to the user keys to be made completely independent of the Administrator's location or time of day. The Mobile PD is connected to the Internet either via USB connector to a PC or via Bluetooth with a Smartphone. If internet access is not available, the administrator can select an interval of offline updates for the Mobile PD. This means that the key may extend its time validation in remote environments without mobile coverage.

Features

- Version Requirements: CLIQ[®] Remote
- Speakers: Acoustic signals
- Material of frame: PC/ABS Plastic
- Color: Black
- Connectivity: USB 2.0 for configuration
- Communication: Bluetooth + USB 2.0
- Interface for debugging: LED 6pcs
- Encryption to server: PKI-SSL 256 bit
- Encryption key: 3DES
- Power supply: 4x AAA-batteries
- Power consumption: 3W Operating
- Temperature range: -40 °C - +80 °C
- Humidity: 20-80%
- Protection Rating: Drip water protected
- Environmental standards and labels: RoHS, CE, FCC
- Weight: 140 g
- Dimensions (W x H x D): 63 x 135 x 26 mm
- Operation: See CLIQ[®] Remote – Mobile PD Manual

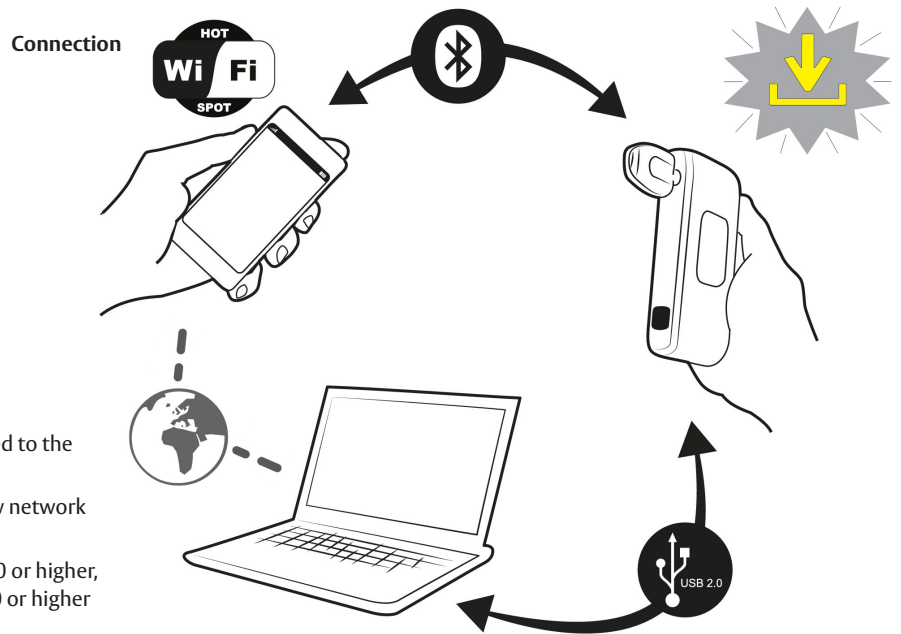


Requirements

- The phone must be connected to the cellular network
- Network operator must allow network sharing
- Tested for iPhone with iOS 3.0 or higher, as well as Android version 4.0 or higher

Indication Mobile PD

- 1 When the CLIQ[®] logo light is solid the Mobile PD is ready to be used. If the light is blinking, Mobile PD is not function ready. In this case contact the system administrator.
- 2 Level of battery – If the indication is lit, the battery level of the key is low and key functionality will end after few operations. Take key to battery change.
- 3 Connection to the CLIQ[®] Remote server – When indication is blinking the Mobile PD is contacting the Remote server. When indication is solid the connection has been established.
- 4 Key programming – When indication is blinking key is programmed. Do not remove key at this stage. Key programming is finished when indication is solid and the Mobile PD gives an audible beep.
- 5 Message – If the system administrator is using e-mail postings for informing the key holders there might be an indication of an e-mail sent. E-mail contains the keys valid time, schedule and authorizations.
- 6 Error – Red light and three audible beeps. An error occurred. Remove the key from the keyway and re-insert it after couple of seconds. If the error persists contact the system administrator.

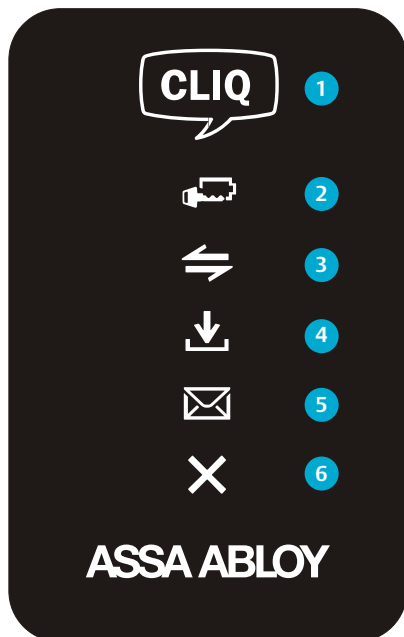

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience

ASSA Inc
110 Sargent Drive
New Haven, CT 06511 USA
Phone 800-235-7482
www.assalock.com

ASSA Canada
160 Four Valley Drive
Vaughan, ON L4K 4T9
Phone 905-738-2466