

ASSA manufactures high security padlocks in three classes, all of which can be integrated into any new or existing ASSA master key system. Our heavy duty padlocks are made from the highest quality materials and have withstood the most rigorous testing procedures. ASSA padlocks are used in a wide variety of applications including storage rooms, perimeter fences, and armories.



Benefits:

- Sturdy design ensures maximum durability
- Class 2 available in key retaining and non-key retaining, extended shackle
- Shackle made of rust resistant case hardened steel
- Hockey Puck style shackleless design provides maximum protection against hacksaw and bolt cutter attacks
- Drain holes to prevent freezing
- No external screws or rivets

Technical Information:

- Class 2 body extruded brass, rust resistant case hardened steel shackle, tensile strength 1.5 tons. (Class 2 not recommended for exterior use)
- Class 2 convertible from key retaining to non-key retaining
- Class 3 body case hardened steel, rust resistant case hardened steel shackle, tensile strength 4.5 tons
- Hockey Puck style body can withstand up to 10,000 lbs of force from bolt cutters
- Stainless steel top pins
- Bottom pins and master pins are nickel silver

Warranty:

- ASSA warrants its cylinders against defective workmanship or wear resulting from defects for one year

Certification:

- All ASSA High Security Padlocks are U.L. 437 listed

General Info.

Electronic Access Control

Keys & Keying

Mortise Cyls.

Rim Cyls.

Mogul Cyls.

IC Core Cyls.

KIK/KIL Cyls.

Deadbolts

Auxiliary Locks

Padlocks


Profile Cyls.

Pin Kits Tools & Accessories


Care & Maint.

Technical Specs.


#2 Padlock

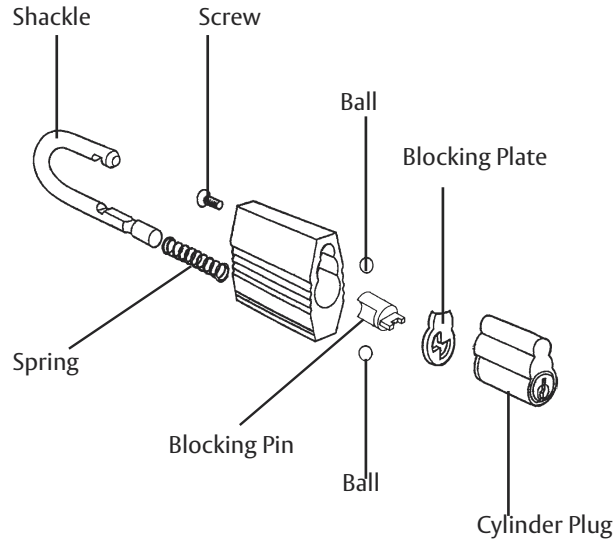


#2 Shrouded Padlock

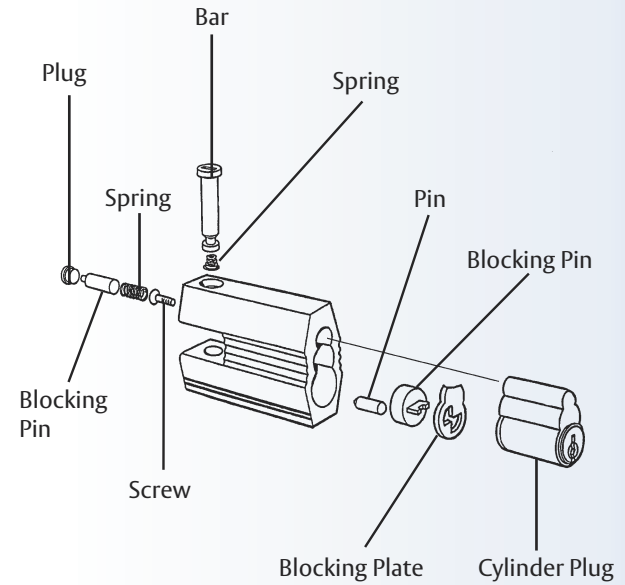



#3 Padlock

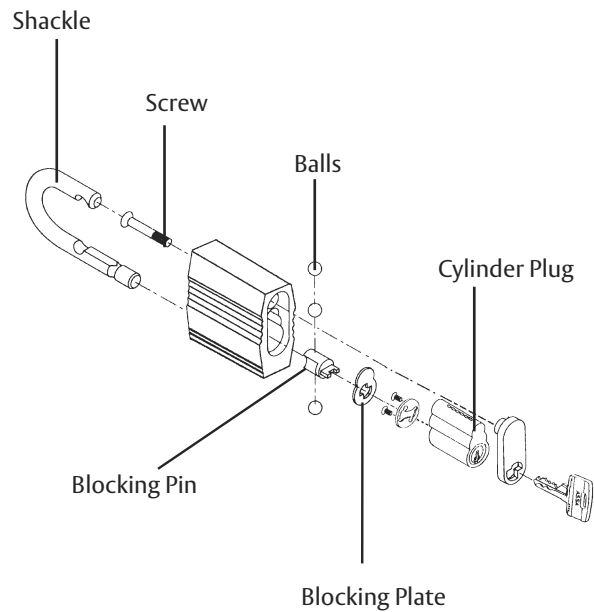

#4-5 Padlock

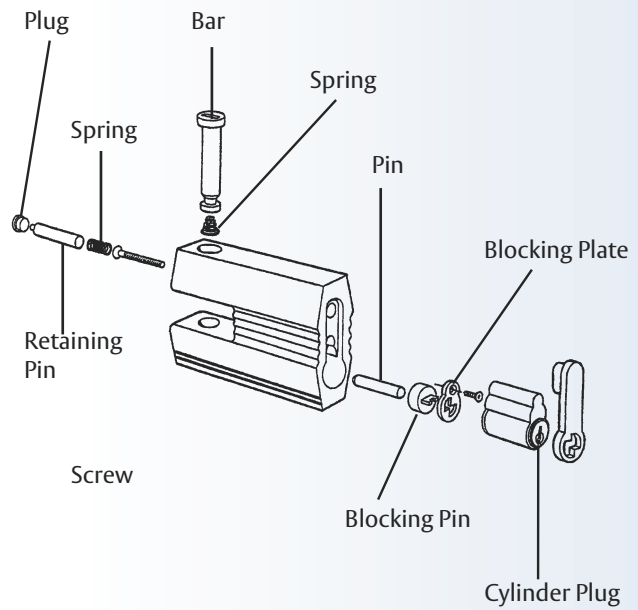



- General Info.
- Electronic Access Control
- Keys & Keying
- Mortise Cyls.
- Rim Cyls.
- Mogul Cyls.
- IC Core Cyls.
- KIK/KIL Cyls.
- Deadbolts
- Auxiliary Locks
- Padlocks**
- Profile Cyls.
- Pin Kits Tools & Accessories
- Care & Maint.
- Technical Specs.

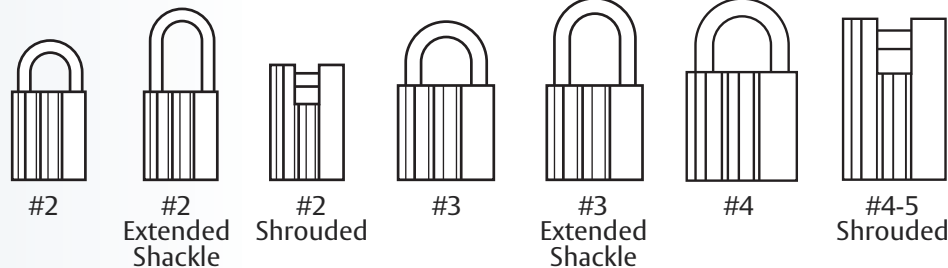

Model#	Notes	Description	A	B	C	D
Maximum +						
98190B		No.2 Non-Key-Retaining	1.900	1.100	0.940	0.315
98190LB		No.2 Non-Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
98190SB		No.2 Non-Key-Ret. w/Shrouded Shackle	1.900	0.535	0.475	0.315
98191B		No.2 Key-Retaining	1.900	1.100	0.940	0.315
98191LB		No.2 Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
98391B		No.3 Key-Retaining	2.450	1.235	1.295	0.395
98391LB		No.3 Key-Retaining Ext. Shackle	2.450	1.875	1.295	0.395
98391SB		No.3 Key Ret. w/Shrouded Shackle	2.450	0.710	0.590	0.395
98491B		No.4 Key-Retaining	3.150	0.985	0.830	0.550
98591SB		No.5 Key Ret. w/Shrouded Shackle	3.150	0.985	0.830	0.550
Maximum + Restricted Padlocks						
R28190B		No.2 Non-Key-Retaining	1.900	1.100	0.940	0.315
R28190LB		No.2 Non-Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
R28191B		No.2 Key-Retaining	1.900	1.100	0.940	0.315
R28191LB		No.2 Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
R28391B		No.3 Key-Retaining	2.450	1.235	1.295	0.395
Twin Maximum						
88190B	CLIQ	No.2 Non-Key-Retaining	1.900	1.100	0.940	0.315
88190LB	CLIQ	No.2 Non-Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
88190SB	CLIQ	No.2 Non-Key-Ret. w/Shrouded Shackle	1.900	0.535	0.475	0.315
88191B	CLIQ	No.2 Key-Retaining	1.900	1.100	0.940	0.315
88191LB	CLIQ	No.2 Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
88391B	CLIQ	No.3 Key-Retaining	2.450	1.235	1.295	0.395
88391LB	CLIQ	No.3 Key-Retaining Ext. Shackle	2.450	1.875	1.295	0.395
88391SB	CLIQ	No.3 Key Ret. w/Shrouded Shackle	2.450	0.710	0.590	0.395
88491B	CLIQ	No.4 Key-Retaining	3.150	0.985	0.830	0.550
88591SB	CLIQ	No.5 Key Ret. w/Shrouded Shackle	3.150	0.985	0.830	0.550
Twin Exclusive						
E65190B		No.2 Non-Key-Retaining	1.900	1.100	0.940	0.315
E65190LB		No.2 Non-Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
E65190SB		No.2 Non-Key-Ret. w/Shrouded Shackle	1.900	0.535	0.475	0.315
E65191B		No.2 Key-Retaining	1.900	1.100	0.940	0.315
E65191LB		No.2 Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
E65391B		No.3 Key-Retaining	2.450	1.235	1.295	0.395
E65391LB		No.3 Key-Retaining Ext. Shackle	2.450	1.875	1.295	0.395
E65391SB		No.3 Key Ret. w/Shrouded Shackle	2.450	0.710	0.590	0.395
E65491B		No.4 Key-Retaining	3.150	0.985	0.830	0.550
E65591SB		No.5 Key Ret. w/Shrouded Shackle	3.150	0.985	0.830	0.550

CLIQ – Twin Maximum available with CLIQ™ Technology. Example: 88191B x CLIQ x 626 x Sidebar x Comp

- General Info.
- Electronic Access Control
- Keys & Keying
- Mortise Cyls.
- Rim Cyls.
- Mogul Cyls.
- IC Core Cyls.
- KIK/KIL Cyls.
- Deadbolts
- Auxiliary Locks
- Padlocks**
- Profile Cyls.
- Pin Kits Tools & Accessories
- Care & Maint.
- Technical Specs.

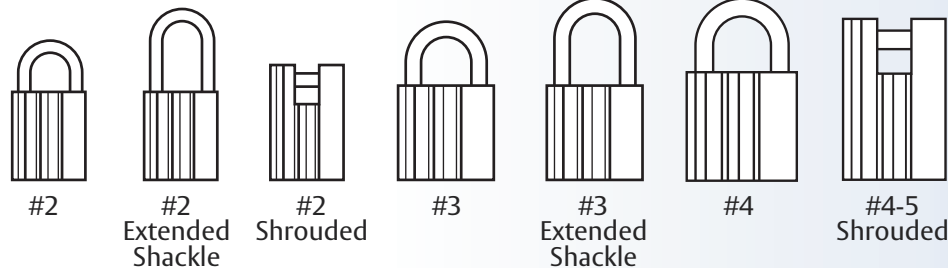


Model#	Notes	Description	A	B	C	D
Twin 6000 Classic						
65190B		No.2 Non-Key-Retaining	1.900	1.100	0.940	0.315
65190LB		No.2 Non-Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
65190SB		No.2 Non-Key-Ret. w/Shrouded Shackle	1.900	0.535	0.475	0.315
65191B		No.2 Key-Retaining	1.900	1.100	0.940	0.315
65191LB		No.2 Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
65391B		No.3 Key-Retaining	2.450	1.235	1.295	0.395
65391LB		No.3 Key-Retaining Ext. Shackle	2.450	1.875	1.295	0.395
65391SB		No.3 Key Ret. w/Shrouded Shackle	2.450	0.710	0.590	0.395
65491B		No.4 Key-Retaining	3.150	0.985	0.830	0.550
65591SB		No.5 Key Ret. w/Shrouded Shackle	3.150	0.985	0.830	0.550
Twin V-10						
V65190B		No.2 Non-Key-Retaining	1.900	1.100	0.940	0.315
V65190LB		No.2 Non-Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
V65190SB		No.2 Non-Key-Ret. w/Shrouded Shackle	1.900	0.535	0.475	0.315
V65191B		No.2 Key-Retaining	1.900	1.100	0.940	0.315
V65191LB		No.2 Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
V65391B		No.3 Key-Retaining	2.450	1.235	1.295	0.395
V65391LB		No.3 Key-Retaining Ext. Shackle	2.450	1.875	1.295	0.395
V65391SB		No.3 Key Ret. w/Shrouded Shackle	2.450	0.710	0.590	0.395
V65491B		No.4 Key-Retaining	3.150	0.985	0.830	0.550
V65591SB		No.5 Key Ret. w/Shrouded Shackle	3.150	0.985	0.830	0.550
600 Series Classic						
6190B		No.2 Non-Key-Retaining	1.900	1.100	0.940	0.315
6190LB		No.2 Non-Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
6190SB		No.2 Non-Key-Ret. w/Shrouded Shackle	1.900	0.535	0.475	0.315
6191B		No.2 Key-Retaining	1.900	1.100	0.940	0.315
6191LB		No.2 Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
6391B		No.3 Key-Retaining	2.450	1.235	1.295	0.395
Twin Pro						
61190B		No.2 Non-Key-Retaining	1.900	1.100	0.940	0.315
61190LB		No.2 Non-Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
61190SB		No.2 Non-Key-Ret. w/Shrouded Shackle	1.900	0.535	0.475	0.315
61191B		No.2 Key-Retaining	1.900	1.100	0.940	0.315
61191LB		No.2 Key-Retaining Ext. Shackle	1.900	2.035	0.940	0.315
61391B		No.3 Key-Retaining	2.450	1.235	1.295	0.395
61391LB		No.3 Key-Retaining Ext. Shackle	2.450	1.875	1.295	0.395
61391SB		No.3 Key Ret. w/Shrouded Shackle	2.450	0.710	0.590	0.395
61491B		No.4 Key-Retaining	3.150	0.985	0.830	0.550
61591SB		No.5 Key Ret. w/Shrouded Shackle	3.150	0.985	0.830	0.550

Padlock Cylinders Only

Model#	Notes	Description
Maximum +		
98911		Padlock Cylinder No. 2, 3, 4-5
Twin Maximum		
88911	CLIQ	Padlock Cylinder No. 2, 3, 4-5
Twin Exclusive		
E65911		Padlock Cylinder No. 2, 3, 4-5
Twin 6000 Classic		
65911		Padlock Cylinder No. 2, 3, 4-5
Twin V-10		
V65911		Padlock Cylinder No. 2, 3, 4-5
Twin Pro		
61911		Padlock Cylinder No. 2, 3, 4-5
600 Series Classic		
6911		Padlock Cylinder No. 2, 3, 4-5

CLIQ – Twin Maximum available with CLIQ™ Technology. Example: 88191B x CLIQ x 626 x Sidebar x Comp

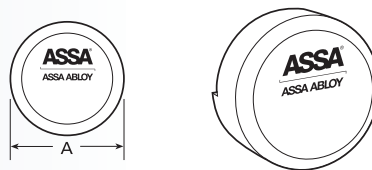

“Hockey Puck” Shackle Less Padlock

Model#	Notes	Description	A
Maximum +			
9840		Hockey Puck Style Padlock	2.875
Twin Maximum			
8840		Hockey Puck Style Padlock	2.875
Twin Exclusive			
E6540		Hockey Puck Style Padlock	2.875
Twin V-10			
V6540		Hockey Puck Style Padlock	2.875
Twin Pro			
6140		Hockey Puck Style Padlock	2.875

“Hockey Puck” Cylinders Only

Model#	Notes	Description
Maximum +		
98411		Hockey Puck Cylinder
Twin Maximum		
88411		Hockey Puck Cylinder
Twin Exclusive		
E65411		Hockey Puck Cylinder
Twin V-10		
V65411		Hockey Puck Cylinder
Twin Pro		
61411		Hockey Puck Cylinder

- General Info.
- Electronic Access Control
- Keys & Keying
- Mortise Cyls.
- Rim Cyls.
- Mogul Cyls.
- IC Core Cyls.
- KIK/KIL Cyls.
- Deadbolts
- Auxiliary Locks
- Padlocks**
- Profile Cyls.
- Pin Kits Tools & Accessories
- Care & Maint.
- Technical Specs.

General Info.

Electronic Access Control

Keys & Keying

Mortise Cyls.

Rim Cyls.

Mogul Cyls.

IC Core Cyls.

KIK/KIL Cyls.

Deadbolts

Auxiliary Locks


Padlocks

Profile Cyls.

Pin Kits Tools & Accessories

Care & Maint.

Technical Specs.

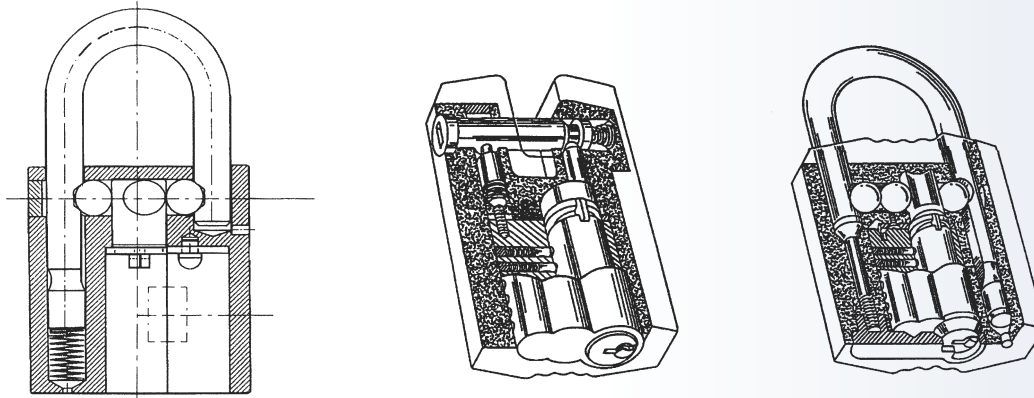

Padlock Component Parts

Model#	Description
806898	No.2 Regular Shackle
807217	No.2 Extended Shackle
P250517	No.2 Shackle Spring
806910	No.3 Padlock Shackle
809387	No.2 Key-Retaining Blocking pin
809388	No.2 Non-Key-Retaining Conversion Kit (Includes Blocking Pin/Spring/Tailpiece)
P793810	No.2 Tailpiece Cam Screws
867046	No.2 Tailpiece Washer
P857300	No.2 Plate & No. 3 Plate
803607	No.2 Locking Balls
P793110	No.2 Cylinder Retaining Screw
806913	No.3 Cylinder Retaining Screw
803575	No.3 Locking Ball Bearings
806911	No.3 Blocking Pin
089280	No.3 Extended Shackle
353969	Twin V-10 Padlock Cylinder Plug
367018	Twin 6000 Classic Padlock Cylinder Plug (Specify Profile 50,52,61,62)
356071	Twin Exclusive / 6000 Classic Padlock Cylinder Plug (Specify Profile 51,851)
816068	Maximum+ / Twin Maximum Padlock Cylinder Plug (Specify Profile 0A7, 0M7)